


# Commercial Line

## Technical Data

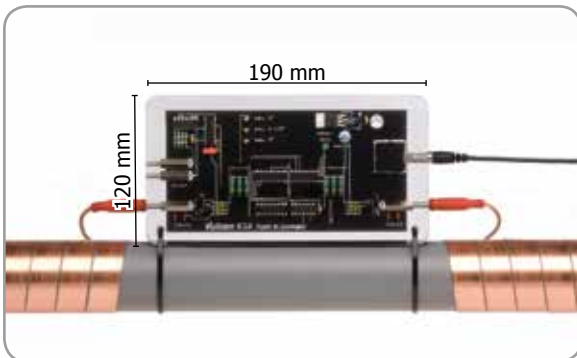

### Vulcan S10

|                                |                                   |
|--------------------------------|-----------------------------------|
| Capacity (max.)                | 15 m <sup>3</sup> /h<br>65 gpm    |
| Maximum pipe diameter          | 3"<br>76 mm                       |
| Voltage                        | 24 Volt                           |
| Wattage                        | 2.25 Watt                         |
| Impulse cable Band width       | 2x3 m (2x 9' 10")<br>20 mm (0.8") |
| Measurements (electronic unit) | 120/190/40 mm<br>4.7"/7.5"/1.6"   |
| Frequency range                | 3-32 kHz                          |
| Required space                 | 500 mm<br>1' 8"                   |
| Programs                       | 3                                 |

#### Electronic Switching power supply unit

|     |                         |
|-----|-------------------------|
| In  | 87-260 Volt<br>50-60 Hz |
| Out | 24 Volt<br>600 mA       |

#### Scope of delivery

- 1 Vulcan S10 electronic unit
- 2 Vulcan Impulse bands
- 1 Power supply
- 6 Cable clips
- 1 Product information brochure
- 1 Warranty card

#### Shipping Measurements (gross)

|                    |                            |                                       |
|--------------------|----------------------------|---------------------------------------|
| <b>Single unit</b> | 52 x 43 x 15 cm<br>4,0 kg  | 1'8.5" x 1'4.9" x 5.9"<br>8.8 lbs     |
| <b>Box of 2</b>    | 67 x 40 x 49 cm<br>9,0 kg  | 2'2.4" x 1'3.7" x 1'7.3"<br>19.8 lbs  |
| <b>Box of 4</b>    | 70 x 60 x 49 cm<br>17,0 kg | 2'3.6" x 1'11.6" x 1'7.3"<br>37.5 lbs |

